TD™

WALLS

Feature Wood Coverings

Caladium Collection

ASTER SERIES

ASTER

Aster is a bold design that enlivens up the interior spaces in a striking manner.
Selected color tones are offered to go with the flow of a vivid theme.

TECHNICAL DETAILS

Wood Pieces Per Panel	: 240
Weight per Panel	: 2.7 kg
Groove Size (mm)	: 2.5 mm
Out-to-Out Panel Size (mm)	: 1273 mm X 658 mm
Out-to-In Panel Size (mm)	: 1273 mm X 588 mm
Coverage in Square Feet	: 8
Thickness of Wood (mm)	: 6 mm
Backing	: Polyester Fabric
Finish	: Raw

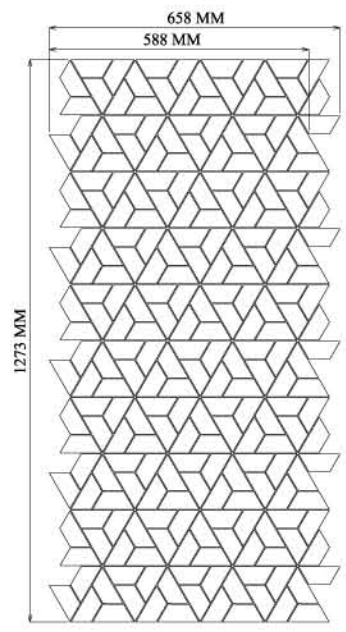

Scan me

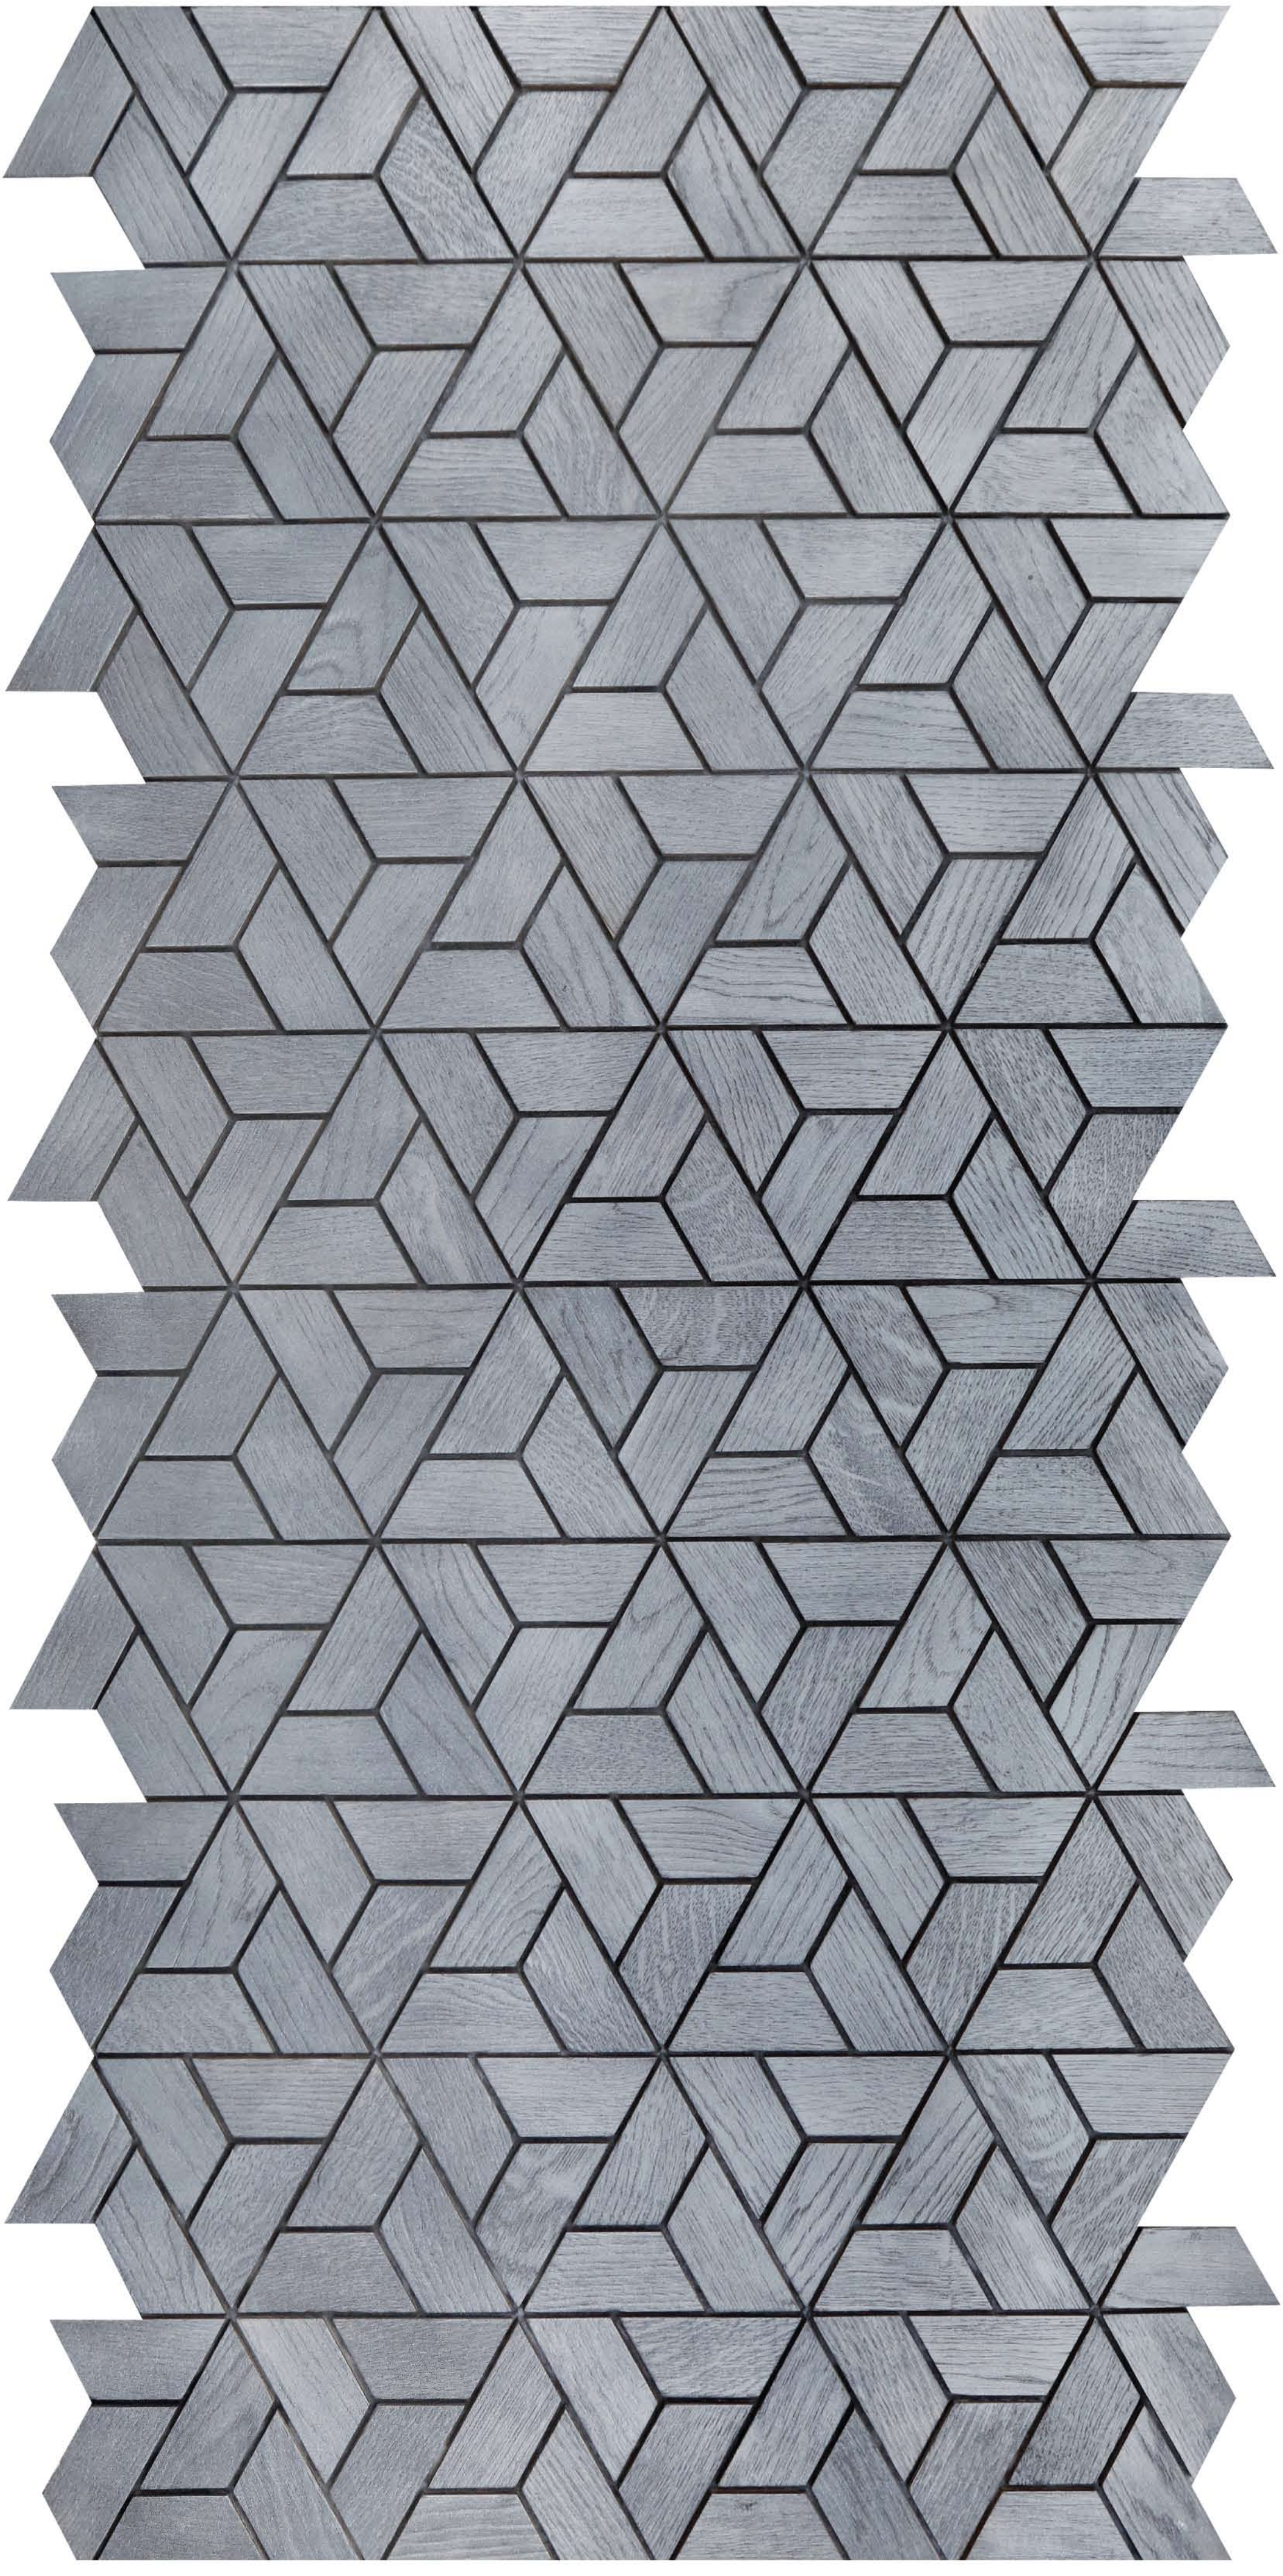

Product picture shown here is for representation purpose only.
Actual color may very from batch to batch.

Product Code : AST-01.7

ASTER

Aster is a bold design that enlivens up the interior spaces in a striking manner.
Selected color tones are offered to go with the flow of a vivid theme.

TECHNICAL DETAILS

Wood Pieces Per Panel	: 240
Weight per Panel	: 2.7 kg
Groove Size (mm)	: 2.5 mm
Out-to-Out Panel Size (mm)	: 1273 mm X 658 mm
Out-to-In Panel Size (mm)	: 1273 mm X 588 mm
Coverage in Square Feet	: 8
Thickness of Wood (mm)	: 6 mm
Backing	: Polyester Fabric
Finish	: Raw

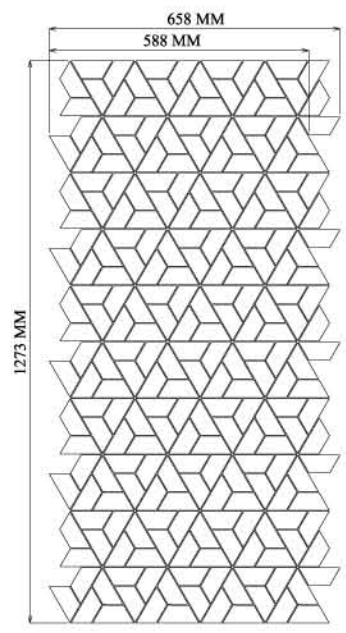

Scan me

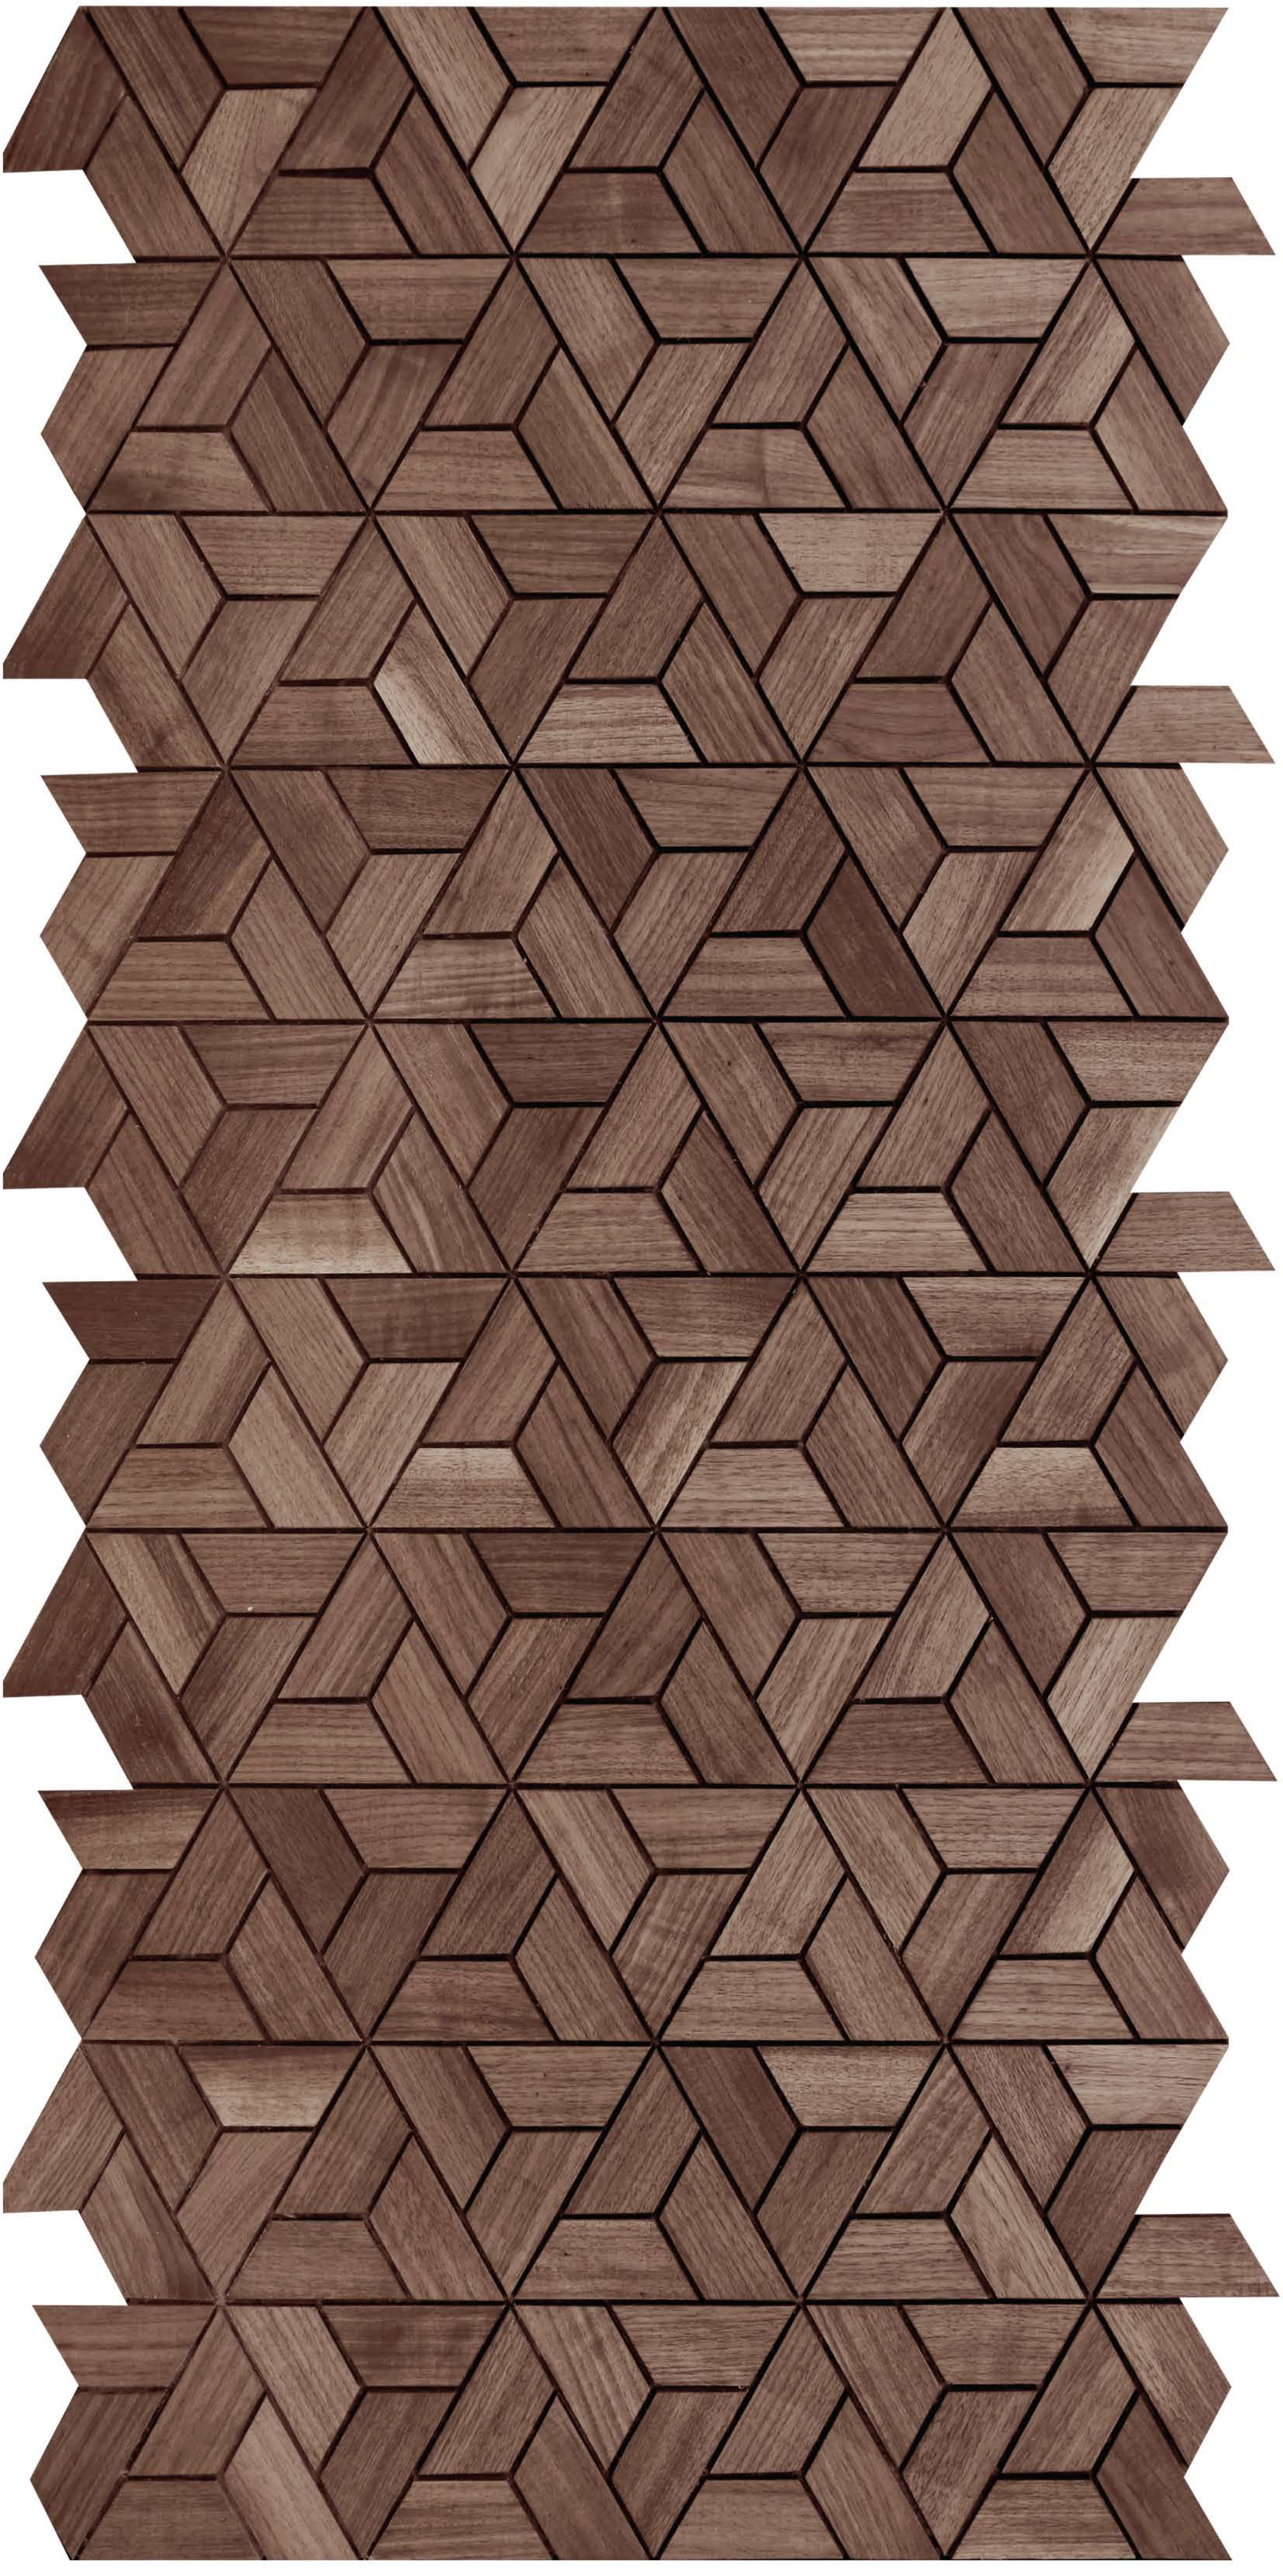

Product picture shown here is for representation purpose only.
Actual color may very from batch to batch.

Product Code : AST-02.0

ASTER

Aster is a bold design that enlivens up the interior spaces in a striking manner.
Selected color tones are offered to go with the flow of a vivid theme.

TECHNICAL DETAILS

Wood Pieces Per Panel	: 240
Weight per Panel	: 2.7 kg
Groove Size (mm)	: 2.5 mm
Out-to-Out Panel Size (mm)	: 1273 mm X 658 mm
Out-to-In Panel Size (mm)	: 1273 mm X 588 mm
Coverage in Square Feet	: 8
Thickness of Wood (mm)	: 6 mm
Backing	: Polyester Fabric
Finish	: Raw

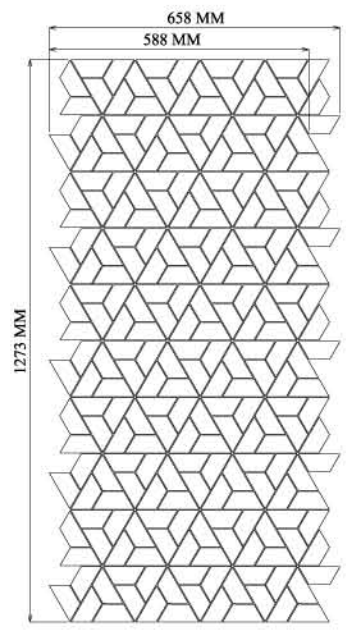

Scan me

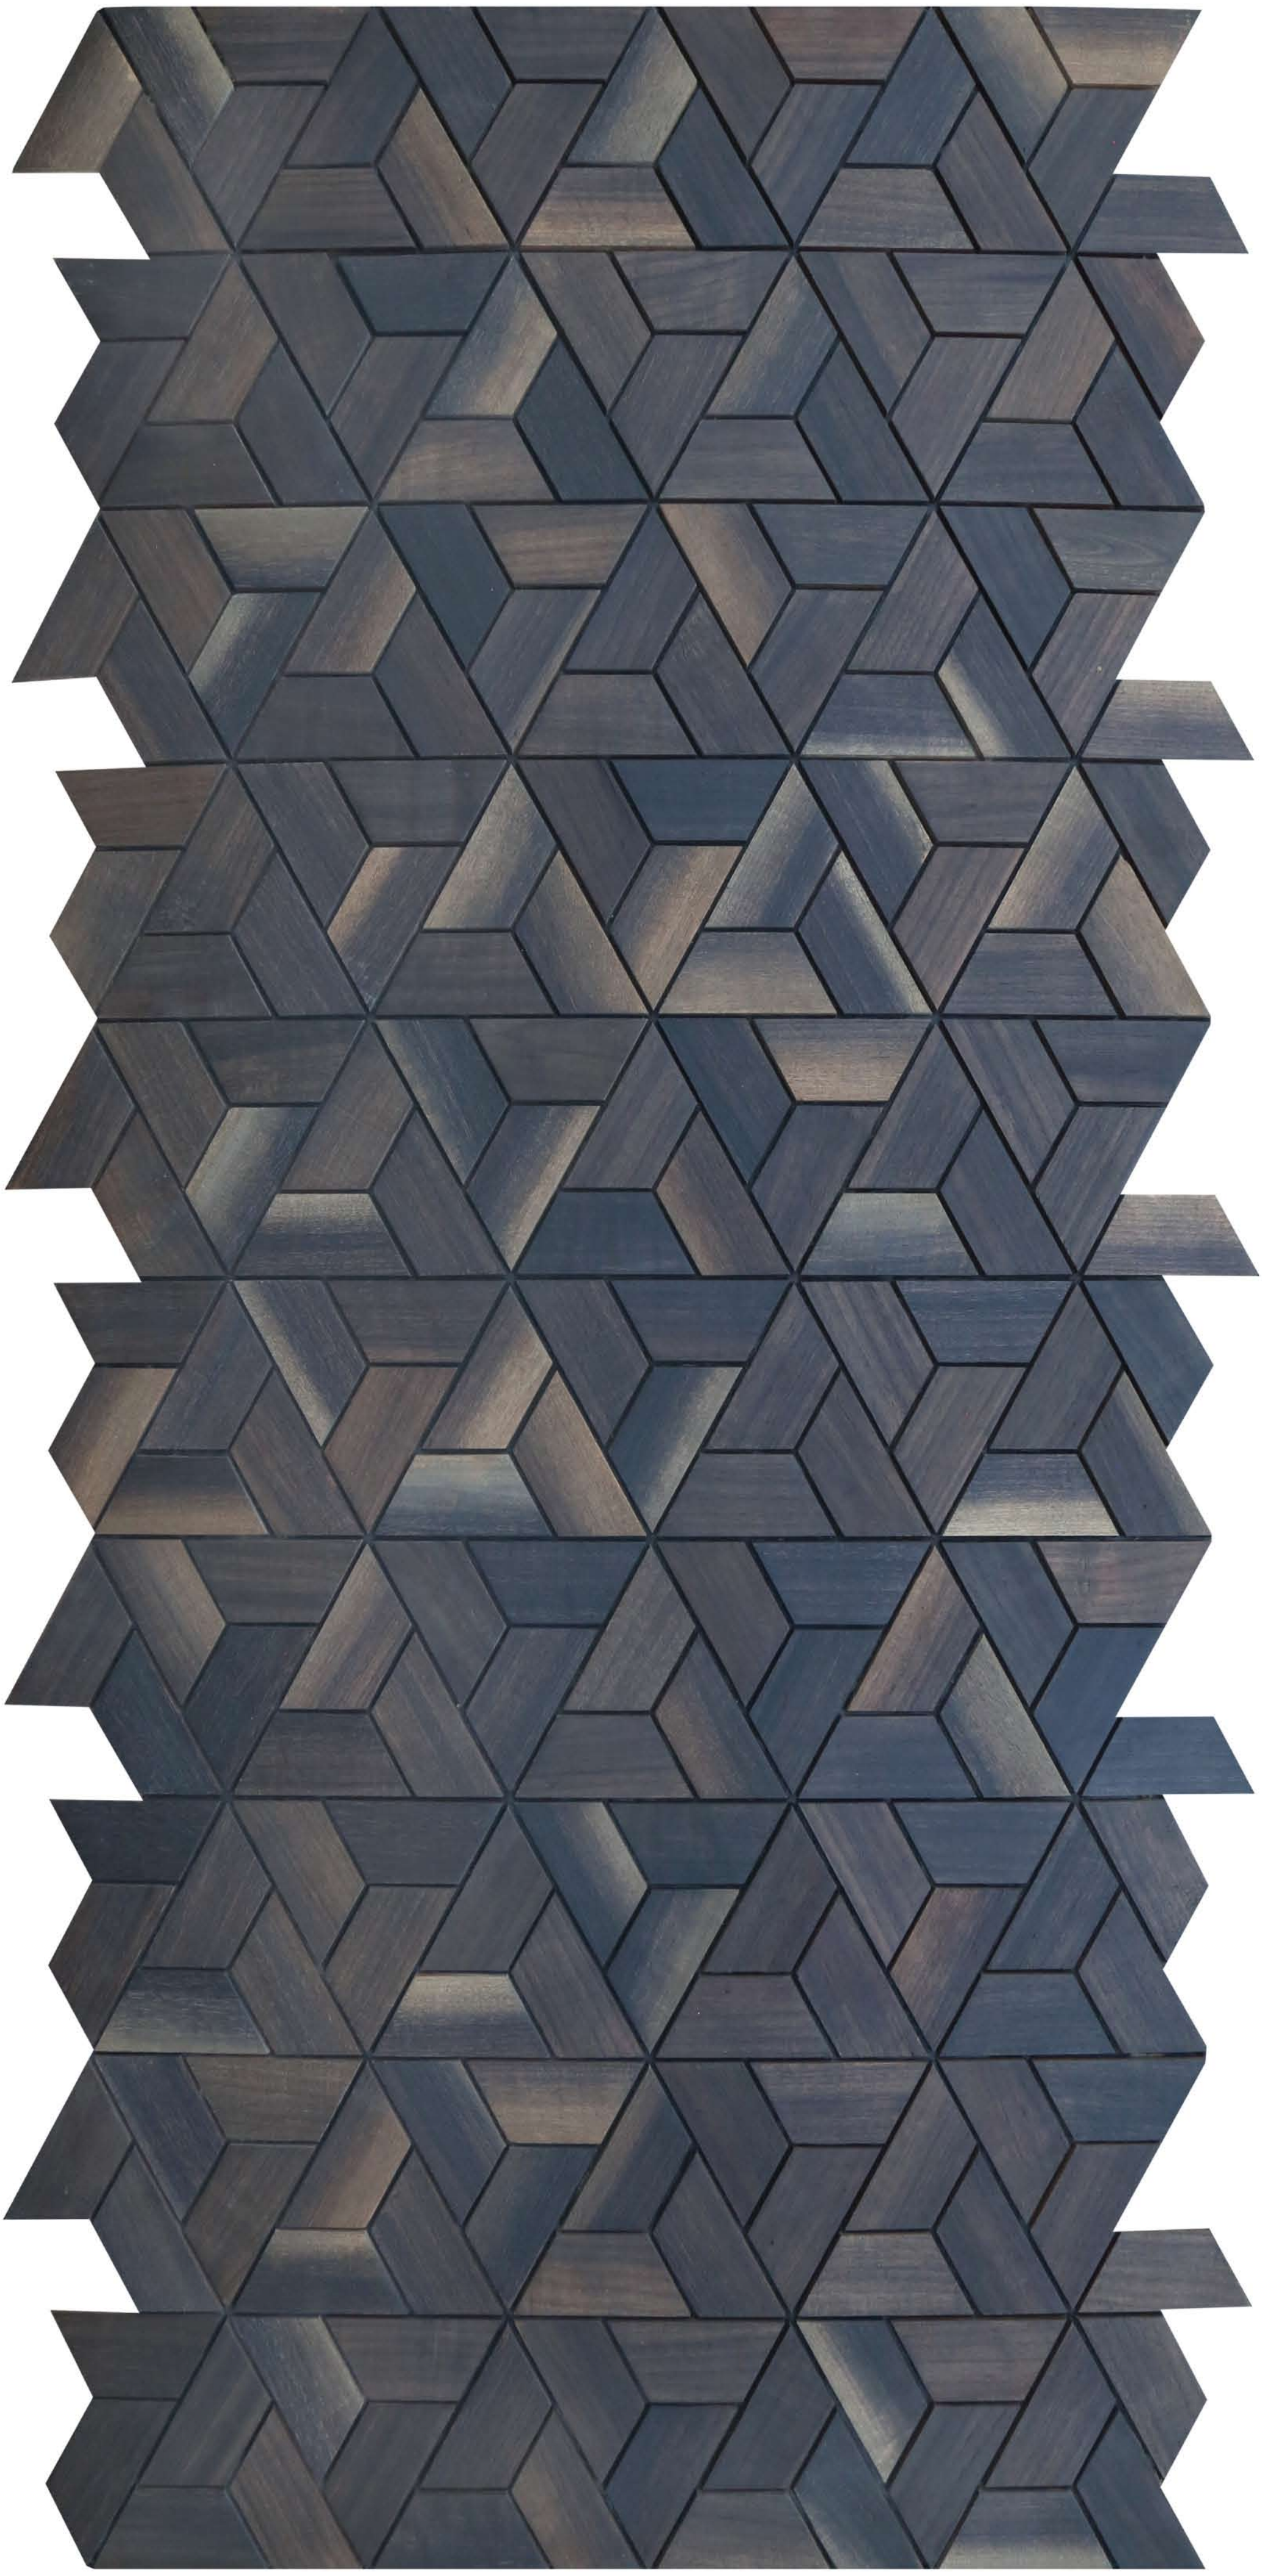

Product picture shown here is for representation purpose only.
Actual color may very from batch to batch.

Product Code : AST-02.2

How to Apply ?

Please follow the application instructions for hassle free installation and maintenance-

1. Provide a completely dry and leveled surface for mounting "TD Walls" Panels. Liner materials such as 6 mm BWP plywood or 6 mm WPC sheets can be used for levelling purposes.
2. If "TD Walls" Panels are mounted directly onto walls (without liner material like plywood or WPC), ensure zero water seepage from the wall.
3. Applications in wet areas or excessively moist areas are not advisable.
4. Any standard glue (substrate to be considered) can be used for mounting "TD Walls" Panels. For standard installations on plywood surfaces standard PVAc white glues are recommended.
5. Always insist on using 2.5 mm spacers while laying out individual pieces next to each other.
6. Spacers should be used on all four sides to finalize placement before applying pressure mechanism to the surface.
7. Always insist on applying uniform pressure on surfaces when liquid white glues are used.
8. Maintain uniform pressure on the surface until the glue dries out completely. It is recommended to provide 6-8 hours curing time for the glue.
9. Please consider ability to apply uniform pressure in applications on curved surfaces.
10. Do not sand heavily for lacquering immediately after application.
11. Allow the water based glues to dry out completely before filling the grooves with grouting material.
12. Apply two sealer coats of standard polyurethane wood sealer by spray gun on the wood surface before using any grouting material. Spray application is mandatory. Roller application is not advisable.
13. Discoloration of wood is possible in case of inappropriate application of base sealer coat; before grouting is done.
14. Epoxy grouts are highly recommended for its water resistance property.
15. Clean the surface thoroughly with a moist cloth after filling grouting material to avoid grout remnants on the surface.
16. Cleaning the grout needs to be timed correctly. Grout should harden slightly before cleaning; but should not be allowed to cure completely.
17. Apply final top coats of standard polyurethane wood coatings for finishing the wood surface after cleaning the surface thoroughly.
18. Standard wood coatings used for veneer/wood surfaces are good for "TD Walls" Panels as well.

Scan this code for how to apply "Wall" video

Scan this code for how to apply "Floor" video

Care

1. Always clean with dry or moist cloth.
2. Avoid cleaning with excessively wet cloths.
3. Avoid highly acidic cleaning agents.
4. Water borne wood cleaning soaps can be used periodically for cleaning.
5. Avoid direct water contact or water logging for long duration on the wood surface.

‘TD Walls’ Panels installation procedure for wall claddings

Step-1: Provide a dry & levelled wall surface

Step-2: Apply liner material

Step-3: Apply glue to product

Step-4: Apply glue to liner material

Step-5: Install panels

Step-6: Use spacers for interlocking panels

Step-7: Apply pressure mechanism

Step-8: Allow glue to dry & cure

‘TD Walls’ Panels installation procedure for floor applications

Step-1: Apply liner material

Step-2: Apply glue to product

Step-3: Apply glue to liner material on floor

Step-4: Install panels

Step-5: Use spacers for interlocking panels

Step-6: Apply pressure mechanism

Step-7: Allow glue to dry & cure before proceeding further

Step-8: Spray 2 coats of standard polyurethane wood sealer coatings

Step-9: Fill epoxy grout material

Step-10: Clean excess grout from wood surface

Step-11: Use polyurethane top coats to finish the surface



Step-12: Allow top coat to dry before final sanding & finishing

Scan me

TURAKHIA DECOR LLP

/turakhiadecor
/turakhiadecor
/turakhiadecor

/turakhiadecor
/turakhiadecor
/company/turakhiadecor

+91 72039 00235
info@turakhiadecor.com
www.turakhiadecor.com